



**Indoor Wide band Omni Antenna , coverage 380MHz - 2700MHz**

<b>Electrical Specifications</b>				
Item No.	AI380-2700H04i360A			
Frequency Range	MHz	380-520	694-960	1690-2700
Gain	dBi	2.0±1.0	2.2±1.0	4.5±1.0
Polarization		Horizontal		
VSWR		≤2.5	≤2.0	≤2.0
PIM, 3rd Order, 2 x 20 W,	dBc	/	≤-140	≤-140
Input Power, maximum	watts	50		
Impedance	ohm	50		
<b>Mechanical Specification</b>				
Connector Type		4.3-10 Female		
Size	mm	Φ266×18		
Antenna Weight	kg	0.4		
Mounting Kit		Ceiling, via hole (standard)		
Radome Material and Color		ABS, White, RAL9003		
Operational Temperature	oC	-55~60		
Operational Humidity	%	< 95		
<b>Radiation Pattern</b>				

**Horizontal pattern**

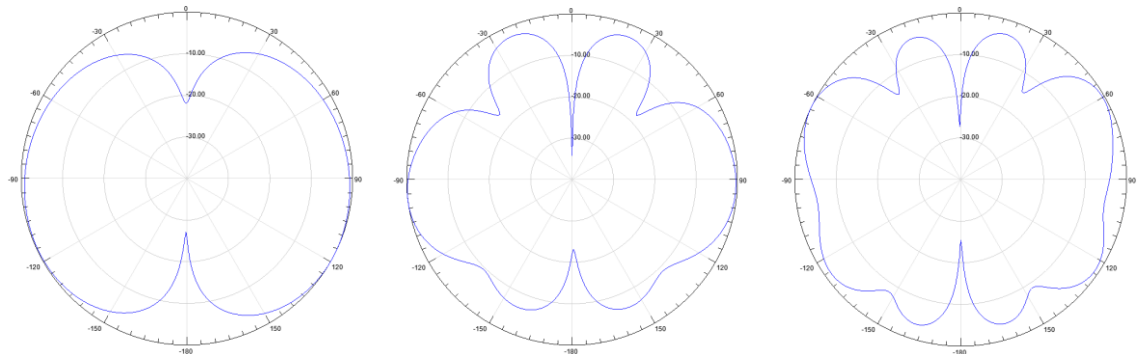

**Vertical pattern**

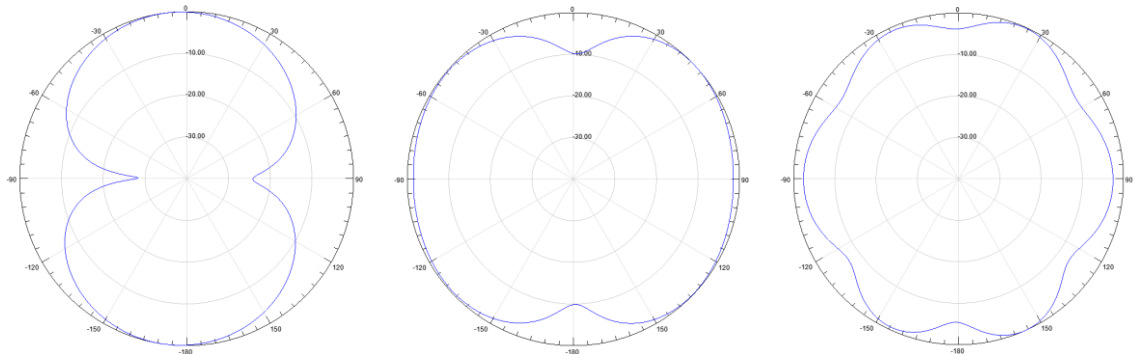

<b>Features and Product Description</b>
<ul style="list-style-type: none"> <li>• Wideband Omni Antenna , coverage 380MHz - 2700MHz .</li> <li>• Typically both used in indoor distribution of GSM/CDMA WIFI/3G/LTE 5G services.</li> <li>• Low return loss,Stable performance.</li> <li>• Compact, light-weight and easy to install.</li> <li>• Supplied with mounting clamp.</li> <li>• PIM&lt;-140dBc @ 2x20 W.</li> <li>• 4.3-10 Female</li> </ul>

