

Hybrid Combiner 4:4

Item No.	HC550-4000 Combiner 4-4
Frequency Range(MHz)	550-4000MHz
Insertion Loss(dB)	550-698MHz ≤8 ; 698-4000MHz≤7.2
VSWR	≤ 1.3
3rd PIM(dBc, @2*43dBm)	-155dBc/-160dBc/-163dBc
Power(W)	300W/500W
Impedance(Ω)	50
RF Connector:	N-F/4.3-10 F/DIN-F



Environmental Specifications

Operating Temperature(°C)	-35° C to +75° C
Relative humidity	≤95%
Applications	Indoor/Outdoor
Waterproof Grade	IP65



Dimensions

RF Connector:	4xN-F	4x4.3-10F	4xDIN-F
Weight(g)	≤2000		
OuterDimension excluding connectors	216*104*63mm		
colour	Black 、 Gray		

3D model

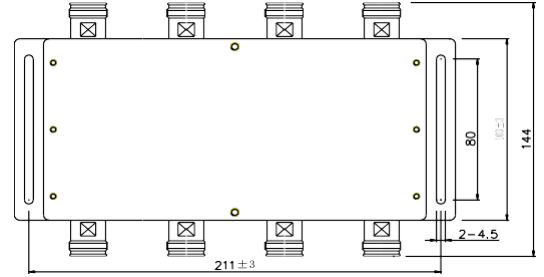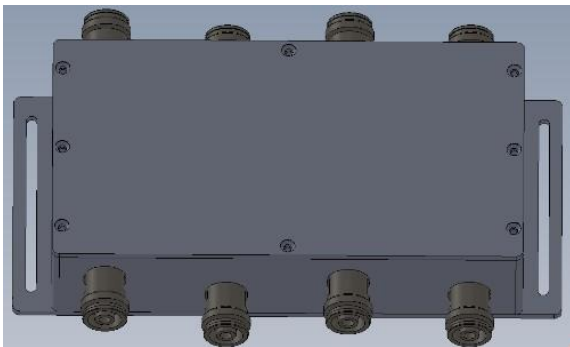

DIN-F

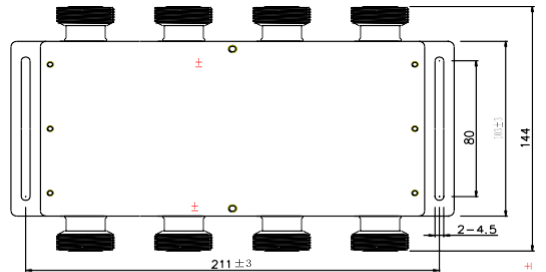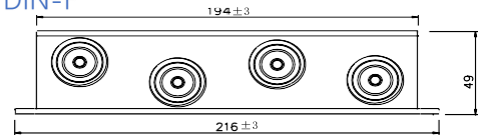

N-F

